

Madison 2.5 metre x 6mm NC Guillotine

Fitted with Estun NC control



Specification


<i>Maximum cutting thickness (mild steel 450n/mm)</i>	<i>6 mm</i>
<i>Maximum cutting width</i>	<i>2500 mm</i>
<i>Range of backgauge</i>	<i>600 mm</i>
<i>Throat depth</i>	<i>100 mm</i>
<i>Stroke per minute</i>	<i>16 / min</i>
<i>Shear angle</i>	<i>1.0 degrees 30 mins</i>
<i>Motor</i>	<i>5.5kw</i>
<i>Machine length</i>	<i>3400 mm</i>
<i>Machine width</i>	<i>1600 mm</i>
<i>Machine height</i>	<i>1700 mm</i>
<i>Machine gross weight (approx.)</i>	<i>4550 Kgs</i>

(The manufacturer reserves the right to alter the specification at any time)

(Above sizes do not include full extremities with rear sensor guards fitted)

Features

- Easy to use NC control
- **Programmable Backgauge**
- Individual Hydraulic hold downs with nylon inserts
- Strong welded structure
- Rear safety sensor system
- **Blade gap** adjustment via handwheel
- Roving foot pedal and pendant
- Squaring arm
- Emergency stop on front
- Machine lighting (this is not shadow lighting)
- Transfer table with ball bearings
- Machine supplied with hydraulic oil
- 12 months warranty

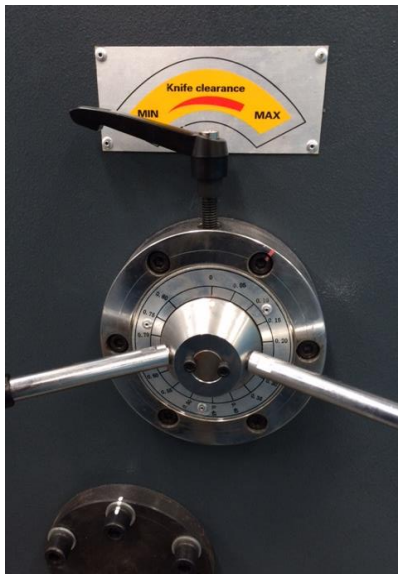

Blade gap adjustment



NC control and pendant

Includes supply of hydraulic oil